eLIGHT

Assembly and safety instructions

To guard against injury, basic safety precautions should be observed, including the following:

Caution:

Since water is employed in the use of Grow Light equipment, to avoid possible electric shock, fire hazards, special care as follows should be taken: If electrical components of the fixture get wet, unplug the appliance immediately.

1. Carefully examine the fixture after installation. It should not be plugged in if there is water on parts not intended to be wet.
2. Do not operate fixture if it has a damaged cord or plug, or if it is malfunctioning or damaged in any manner.
3. Close supervision is necessary when any appliance is used by or near children.
4. To avoid injury, do not contact hot parts such as lamps, the glass and the like.
5. Always unplug the fixture from an outlet when not in use, before putting on or taking off parts, and before cleaning.
6. Do not use the fixture for other than intended use. Do not install or store the fixture where it will be exposed to the weather or to temperatures below freezing. Make sure the fixture is securely installed before operating. Read and observe all the important notices on the fixture.

Important Safety Guide

Please check the following when you receive the item: Check whether the tubes or sockets are intact if broken or cracked, please do not install them. Make sure the sockets are in their original positions. If the sockets loosen, please refasten them.

Please note:

Before using the Grow Light, please remember to take away all the packaging materials (like EPE foam beneath the bulbs and film on the acrylic shield) that protect the tubes during transportation

Installation Instructions

1. Open the package and remove the Grow Light.
2. Peel off the protective film to get optimum light performance and avoid over-heating.
3. Remove the packages that protect the bulbs and the light, such as foam, bubble pack material, et

Grow Light

#6292 T5 - 2 tube HO

T5 High Output Tubes

1. Gently remove the tubes and remove all bubble sheets around the tubes.

2. Insert the tubes into the sockets, **make sure the tubes are inserted fully into each side. Hold both ends of the tube and twist 1/4 turn in same direction simultaneously until it "clicks" in place**, otherwise, it may damage the tube after power on.

Please note: Do not hold only one end of tube for turning, make sure that you hold both ends of it to turn 90 degree simultaneously.

3. Attach the S hooks and chain then hang securely.

Wiring and Ballast replacement

Ballast door wiring access

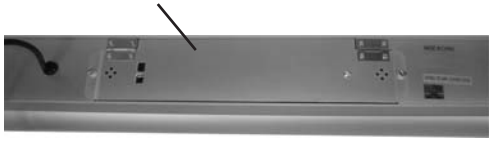

Care and Operation

1. For maximum performance, inspect monthly.
2. Remove any salt build up (sediment if there is any) with a damp cloth to avoid corrosion or damage on the fixture.
3. Replace any part that shows signs of corrosion including the power cords, it must be removed from service and repaired before operating again.

Thank you for purchasing this Grow Light. For more information please email us at info@HomeSelects.com.

HomeSelects